

# Spray



	Page	Rubber	Thermoplastic	Textile	Wire	Temp. Range	MSHA
Mine Spray	148	Yes			Yes	0°F to 212°F	Yes
NR Spray	217	Yes		Yes		0°F to 190°F	
Pliovic® Ag Spray (1800 & 2400)	218		Yes	Yes		0°F to 158°F	

**Air & Multipurpose**  
 General Purpose  
 Heavy Duty  
 Push-on

Chemical Transfer

Cleaning Equipment

**Food**  
 Transfer  
 Washdown

Marine

**Material Handling**  
 Abrasives  
 Bulk Transfer  
 Cement & Concrete

Mining

**Petroleum**  
 Aircraft Fueling  
 Dispensing  
 Dock  
 Transfer

Spray

Steam

Vacuum

LPG Delivery

**Water**  
 Discharge  
 Suction & Discharge  
 Washdown

Welding

Coupling Systems

Equipment

Appendix

# NR Spray



## Product Specifications

### Application

NR Spray is a premium-quality, all-purpose hose for handling a variety of applications such as paint spray or agricultural spray. Will handle spraying paints, automotive finish paints, lacquers, thinners, turpentine, air, oil and a large variety of solvents and chemicals.

### Construction Tube

Nylon, silicone-free

### Cover

Black synthetic rubber, RMA Class B (Medium Oil Resistance)

### Reinforcement

Braided synthetic yarn (1/4" and 3/8"-1 braid) (1/2", 3/4" and 1"-2 braid)

### Temperature Range

0°F to 190°F (-18°C to 88°C)

### Packaging

500' reel, maximum 3 pieces, 50' minimum

### Branding

Example: Continental ContiTech 1/4" IBD NR Spray. Made in U.S.A.

### Couplings

Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

### Order Codes

536-290

## NR Spray

SAP #	ID		Nom. OD		Max. WP		Weight	
	in.	mm	in.	mm	psi	MPa	lb./ft.	kg/m
20022944	1/4	6.4	0.49	12.4	750	5.17	0.08	0.12
20106900	5/16	7.9	0.61	15.5	750	5.17	0.13	0.19
20022951	3/8	9.5	0.70	17.8	750	5.17	0.15	0.22
20022962	1/2	12.7	0.87	22.1	750	5.17	0.22	0.33
20022967	5/8	15.9	1.05	26.7	750	5.17	0.31	0.46
20022969	3/4	19.1	1.19	30.2	750	5.17	0.36	0.54
20022976	1	25.4	1.51	38.4	750	5.17	0.54	0.80

### Air & Multipurpose

General Purpose

Heavy Duty

Push-on

Chemical Transfer

Cleaning Equipment

Food

Transfer

Washdown

Marine

Material Handling

Abrasives

Bulk Transfer

Cement & Concrete

Mining

Petroleum

Aircraft Fueling

Dispensing

Dock

Transfer

Spray

Steam

Vacuum

LPG Delivery

Water

Discharge

Suction & Discharge

Washdown


Welding

Coupling Systems

Equipment

Appendix

# Pliovic® AG Spray

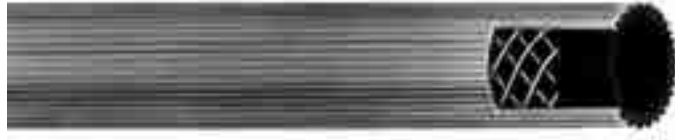

## Product Specifications

### Application

A lightweight, economical high-pressure hose for carrying air, water and many spray solutions in agricultural applications: including Xylene up to 10% concentration. Safety factor 3:1.

### Construction Tube

Pliovic® RMA Class B (Medium Oil Resistance)

### Cover

Orange or green Pliovic® (ribbed finish)

### Reinforcement

Spiral synthetic yarn

### Temperature Range

0°F to 158°F (-18°C to 70°C)

### Pliovic® 1800 (Orange)

Order Codes: 540-211

SAP #	ID		Nom. OD		Max. WP		Weight	
	in.	mm	in.	mm	psi	MPa	lb./ft.	kg/m
20012638	3/8	9.5	0.69	17.5	600	4.14	0.14	0.21
20012641	1/2	12.7	0.78	19.8	600	4.14	0.19	0.28
20012643	3/4	19.1	1.10	27.9	600	4.14	0.28	0.42

### Pliovic® 2400 (Green)

Order Codes: 540-208

SAP #	ID		Nom. OD		Max. WP		Weight	
	in.	mm	in.	mm	psi	MPa	lb./ft.	kg/m
20012626	3/8	9.5	0.70	17.8	800	5.52	0.14	0.21
20012632	1/2	12.7	0.85	21.6	800	5.52	0.20	0.30
20012635	3/4	19.1	1.10	27.9	800	5.52	0.28	0.42

### Packaging

300' length, coiled and polywrapped

### Branding

Example: Continental ContiTech Pliovic® 1800 Spray 1/2" (12.7mm). Made in U.S.A.

### Couplings

Contact fitting manufacturer for proper fitting recommendation and coupling procedure.

**Air & Multipurpose**  
General Purpose  
Heavy Duty  
Push-on

Chemical Transfer

Cleaning Equipment

**Food**  
Transfer  
Washdown

Marine

**Material Handling**  
Abrasives  
Bulk Transfer  
Cement & Concrete

Mining

**Petroleum**  
Aircraft Fueling  
Dispensing  
Dock  
Transfer

Spray

Steam

Vacuum

LPG Delivery

**Water**  
Discharge  
Suction & Discharge  
Washdown

Welding

Coupling Systems

Equipment

Appendix