

PERFORMANCE CURVES


C1GA2GA R3



1GA & 2GA

SUBMERSIBLE GRINDER PUMPS


1Ø Composite Curves

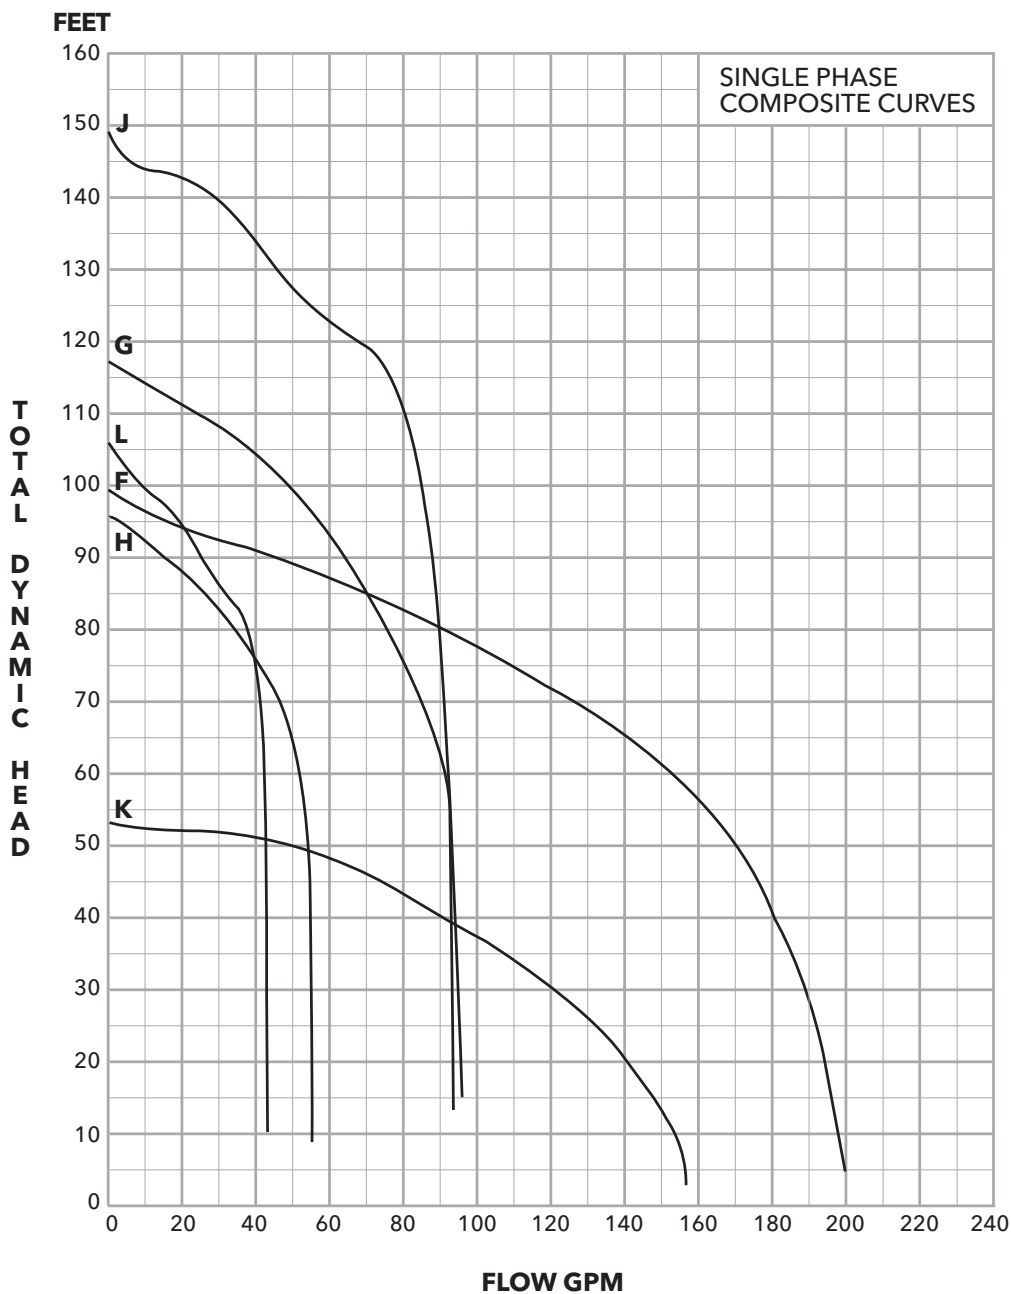

Impeller Code	Order Number	HP
F	2GA31J1FD	9.4
G	1GA81H1GD	5.4
H	1GA71G1HD	3
J	2GA31J1JD	9.4
K	2GA81H1KD	5.4
L	1GA71G1LD	3

Customer _____
Pump Item _____
Condition of Service _____ Impeller Diameter _____
_____ GPM _____ TDH _____ EFF%
Certified for: _____ Approval <input type="checkbox"/>
By _____ Date _____ Record <input type="checkbox"/>


3Ø Composite Curves

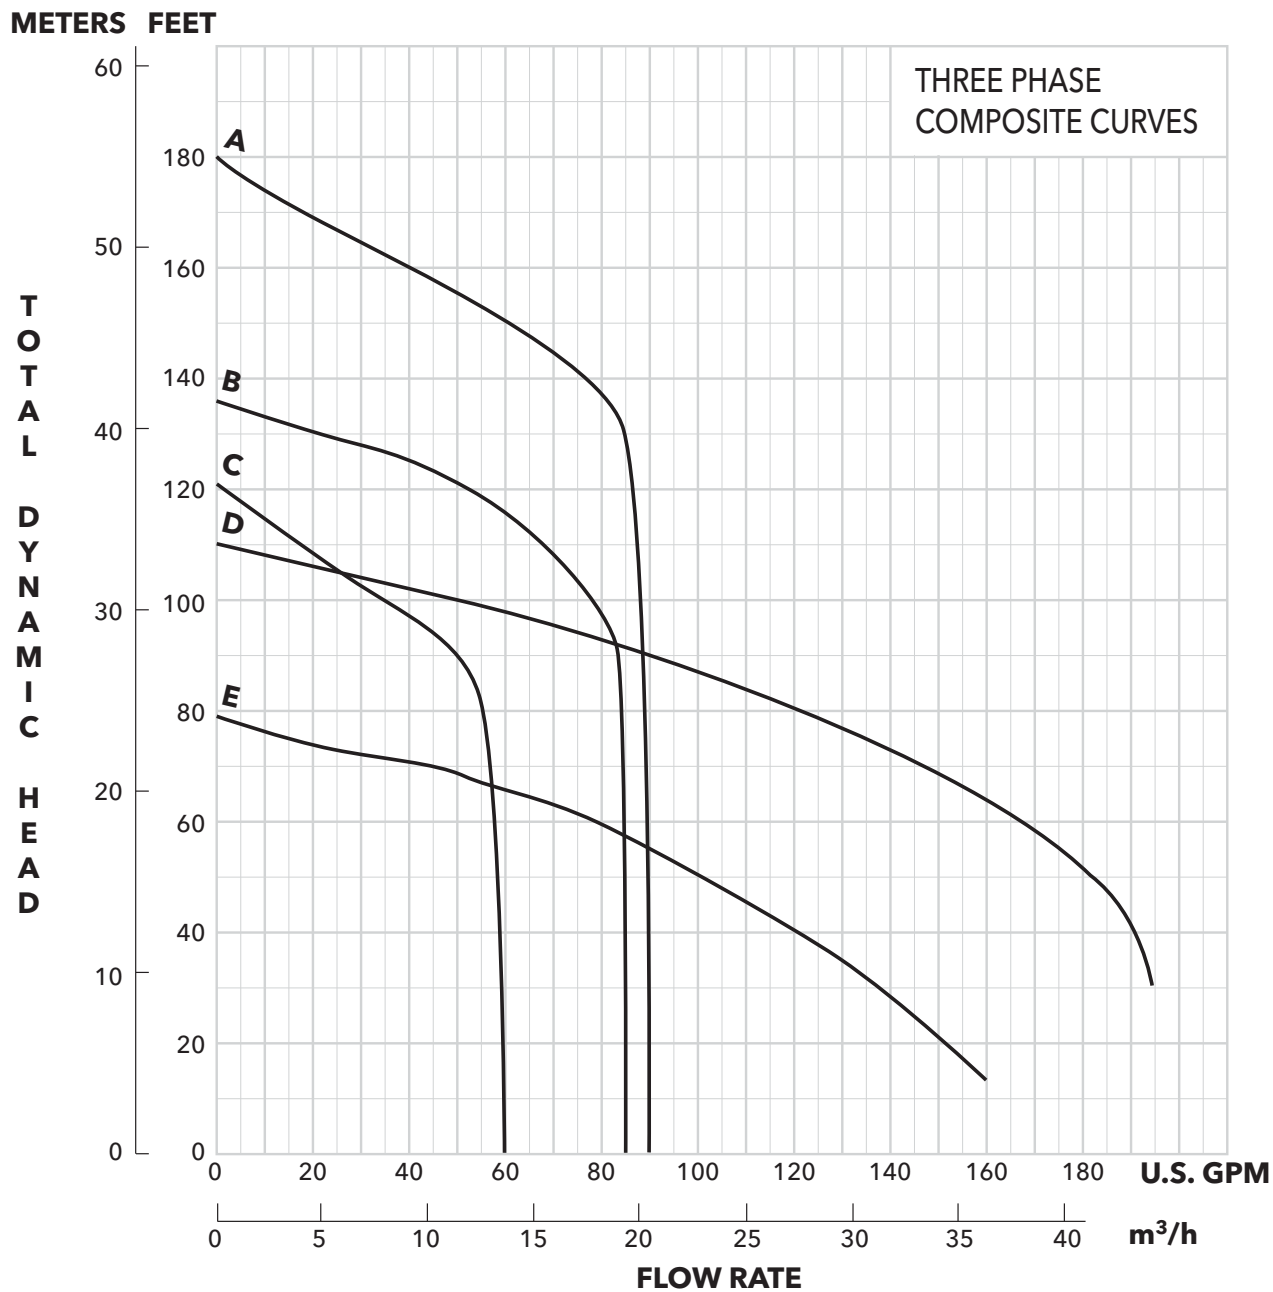

Impeller Code	Order Number	HP
A	2GA-1K-AD	11
B	1GA-1J-BD	6
C	1GA-1H-CD	4
D	2GA-1K-DD	11
E	2GA-1J-ED	6


Customer _____
Pump Item _____
Condition of Service Impeller Diameter _____
_____ GPM _____ TDH _____ EFF%
Certified for: _____ Approval <input type="checkbox"/>
By _____ Date _____ Record <input type="checkbox"/>

1GA 3 HP Single Phase "H" Curve

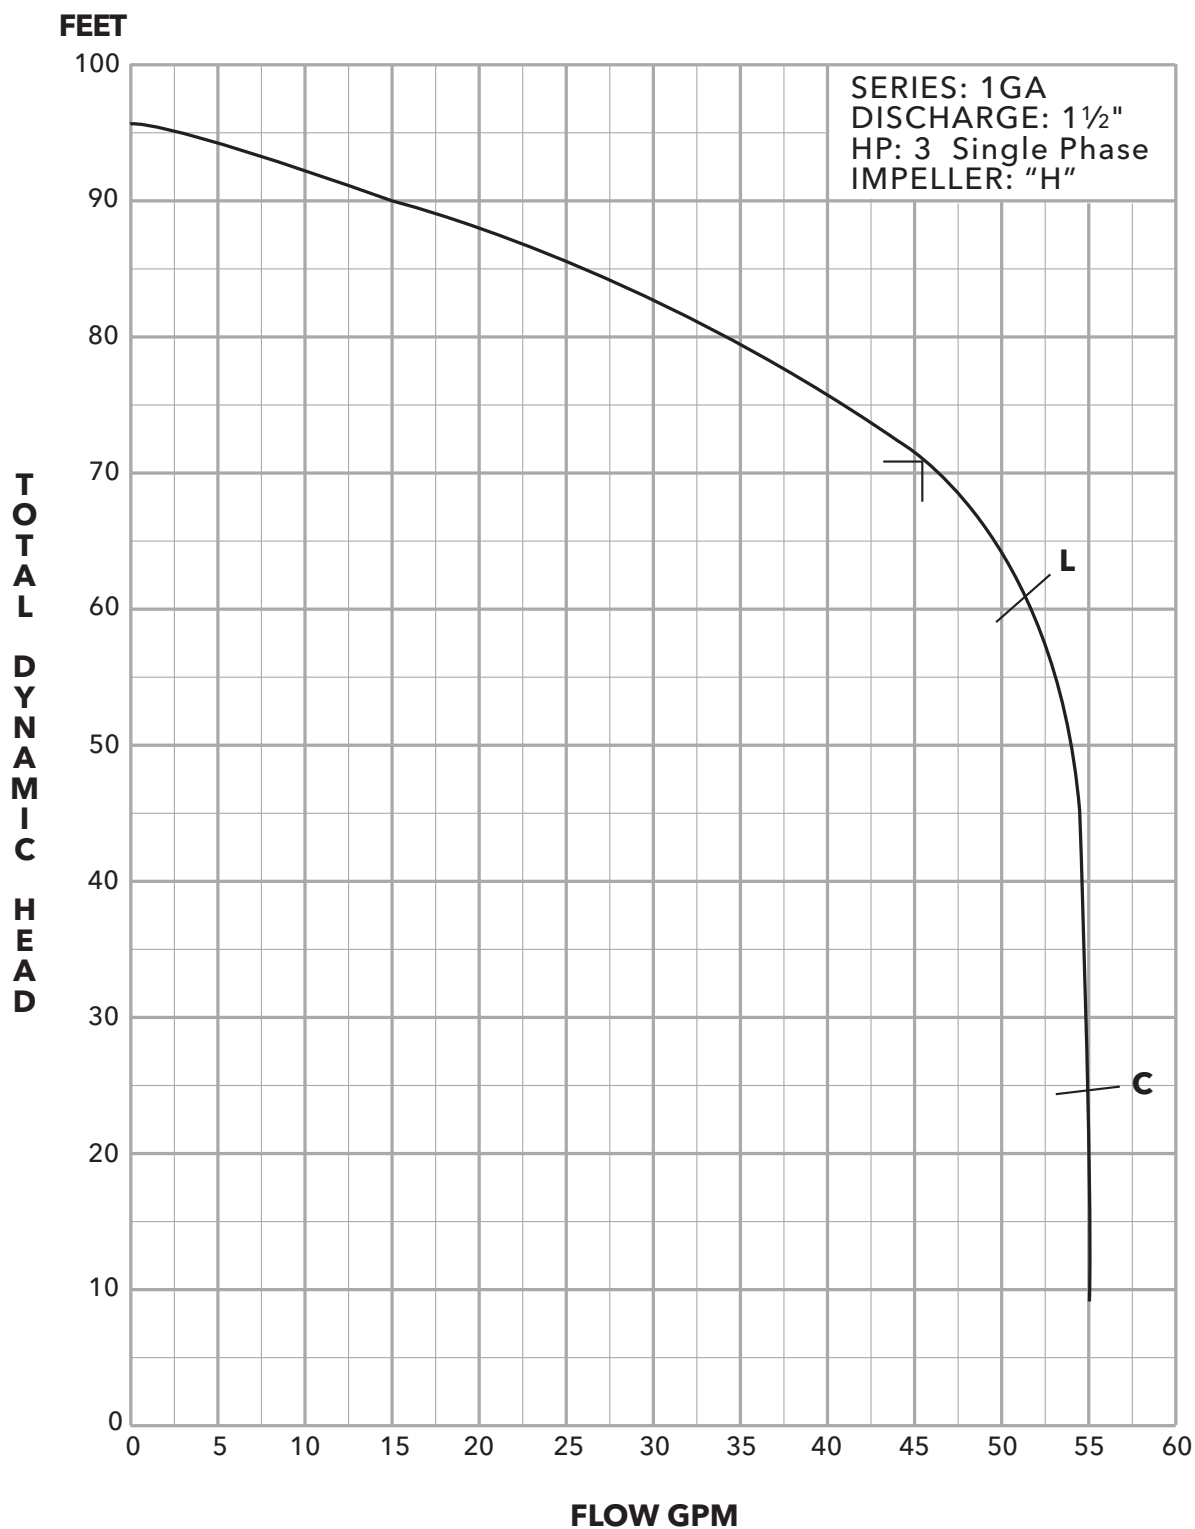


┌ = Best Efficiency
L = Limited to intermittent duty below this point
C = Cavitation limit

1GA 3 HP Single Phase "L" Curve

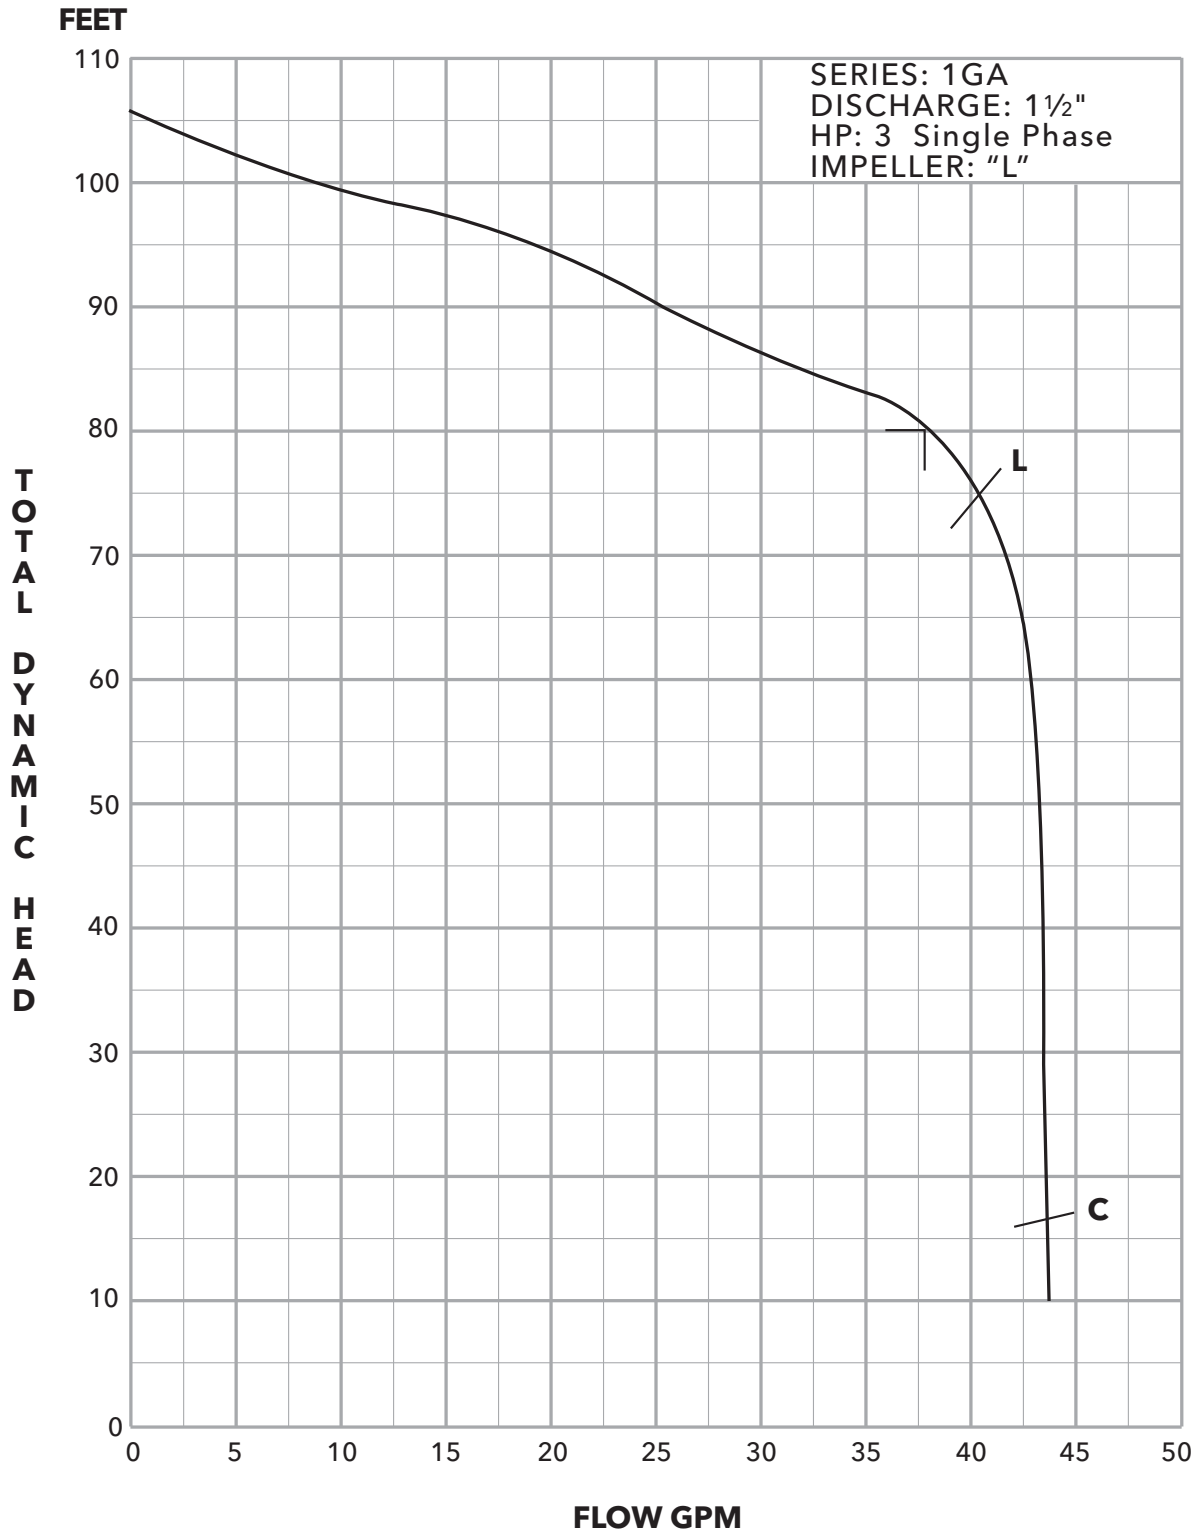


- ┌ = Best Efficiency
- L = Limited to intermittent duty below this point
- C = Cavitation limit

1GA 5.4 HP Single Phase "G" Curve

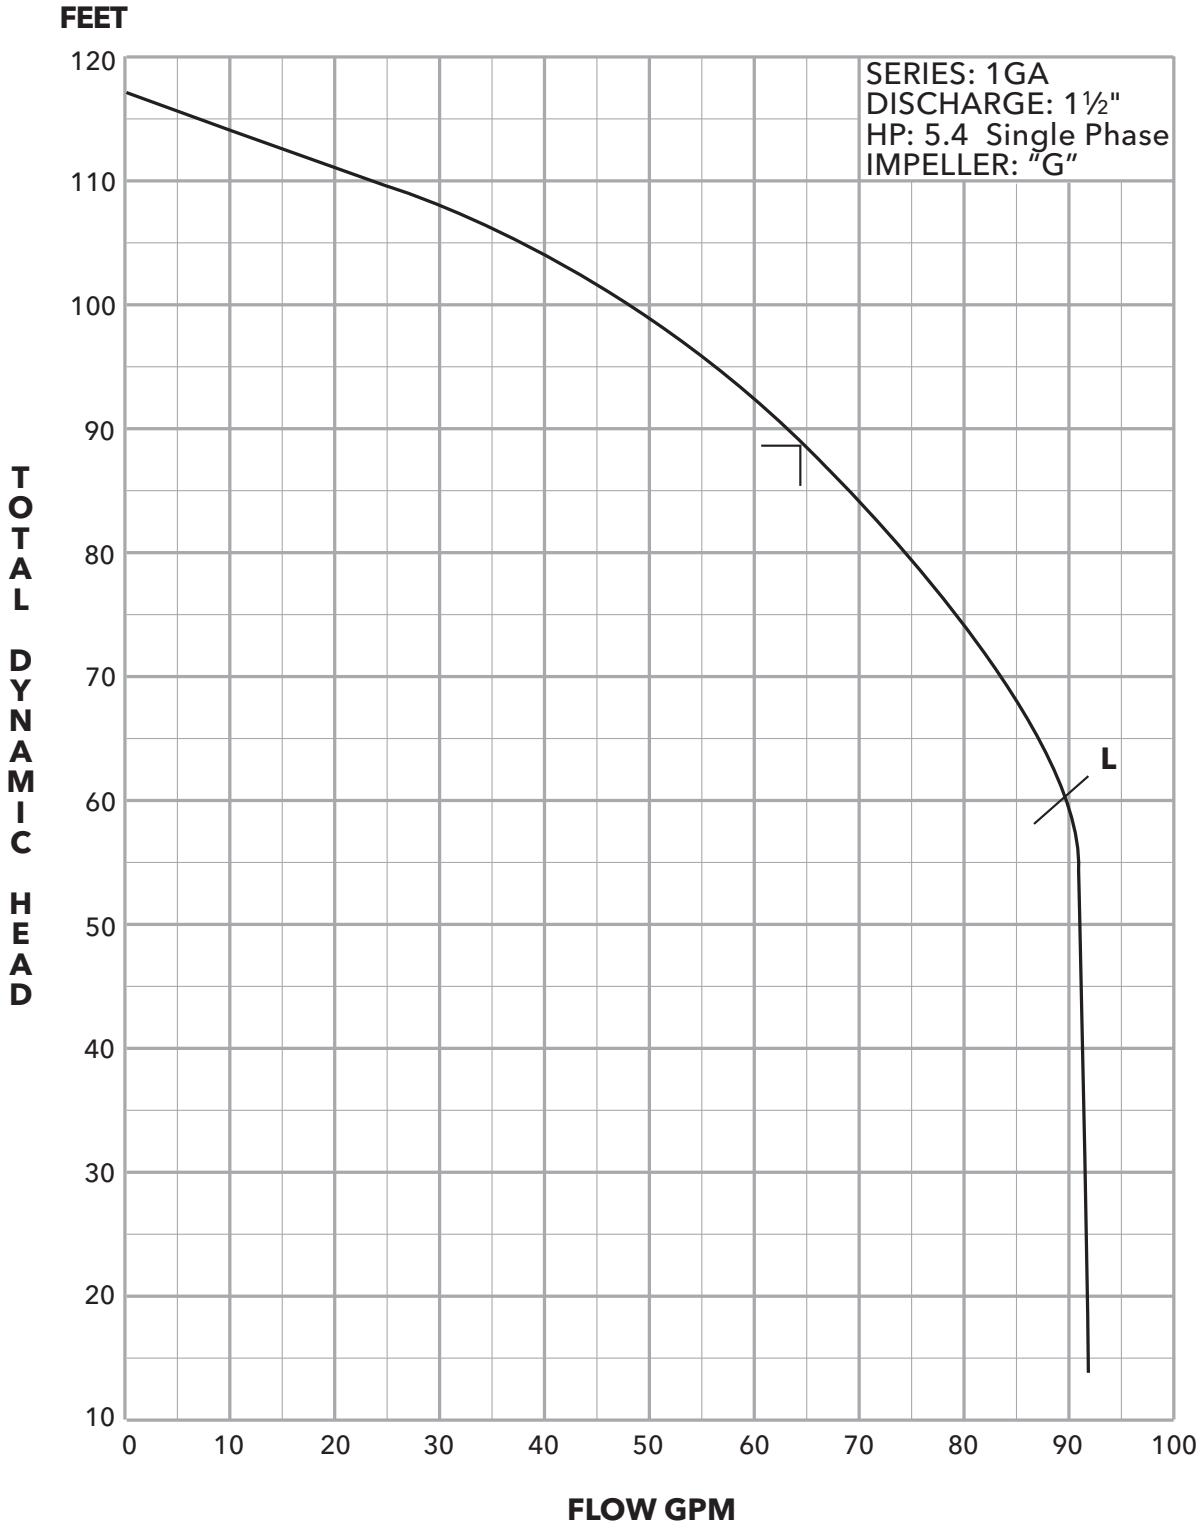

┌ = Best Efficiency
L = Limited to intermittent duty below this point


2GA 5.4 HP Single Phase "K" Curve

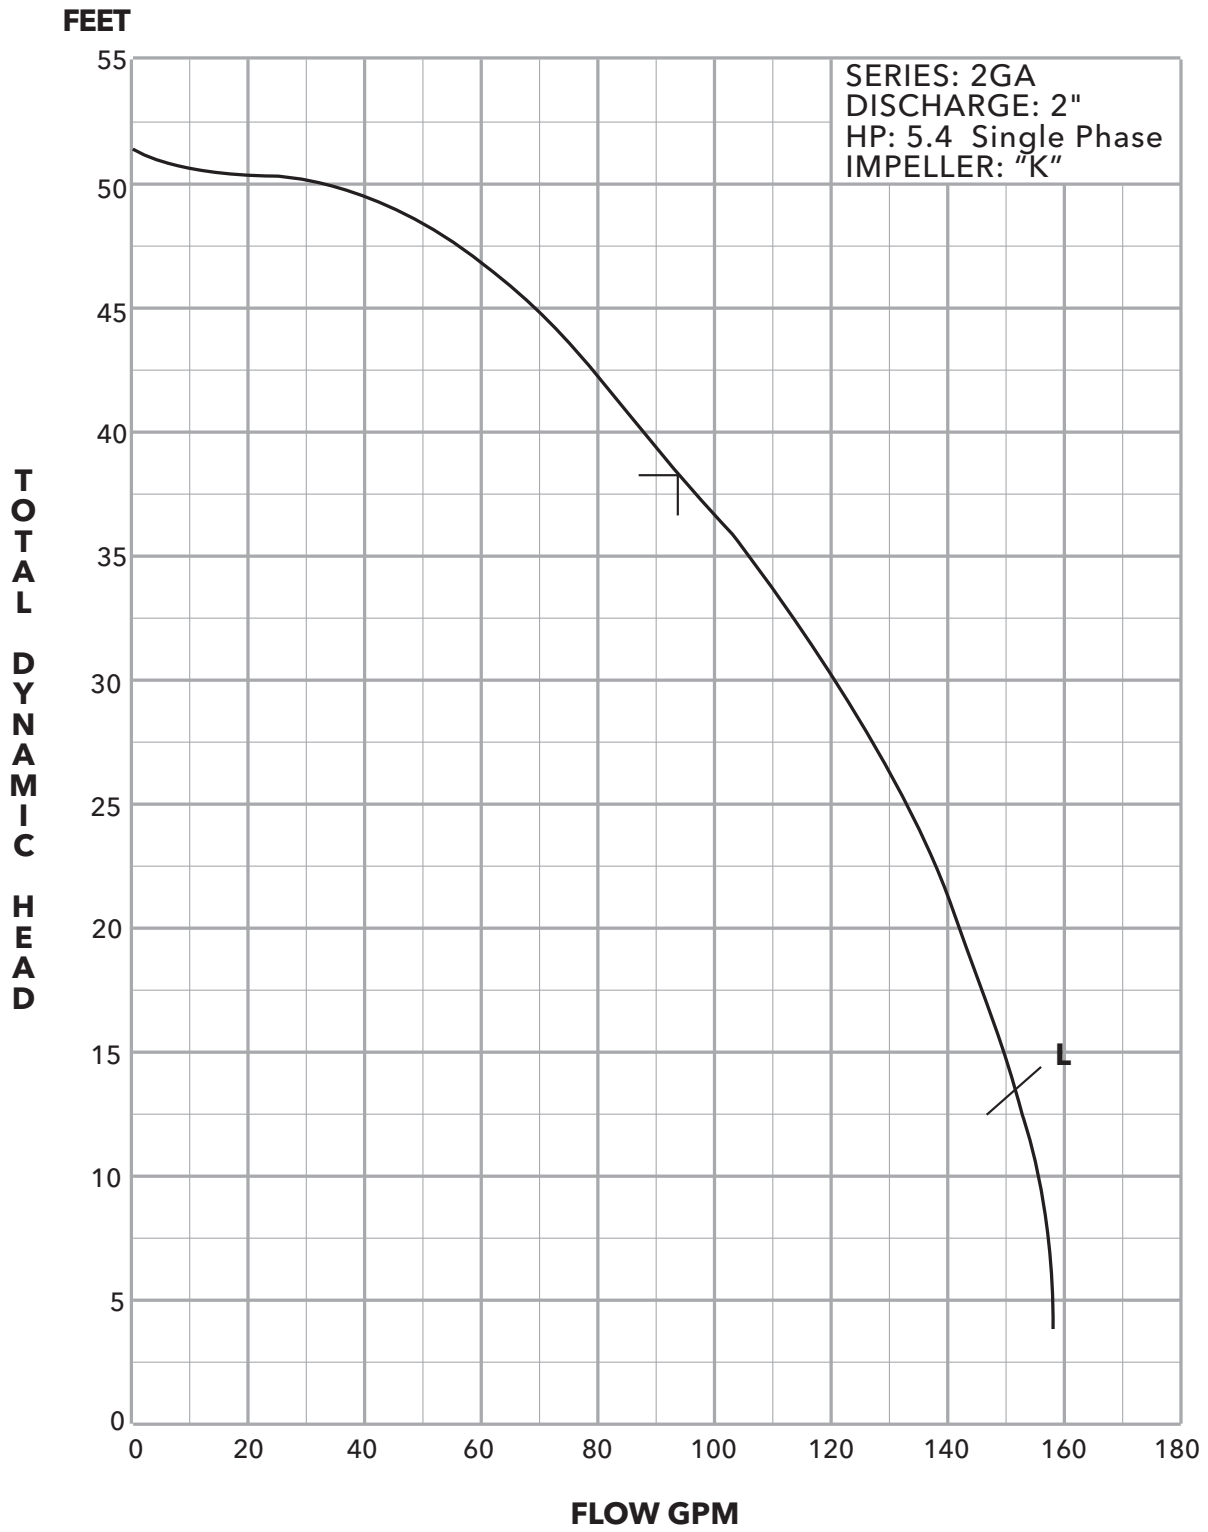

┌ = Best Efficiency


L = Limited to intermittent duty below this point

2GA 9.4 HP Single Phase "F" Curve

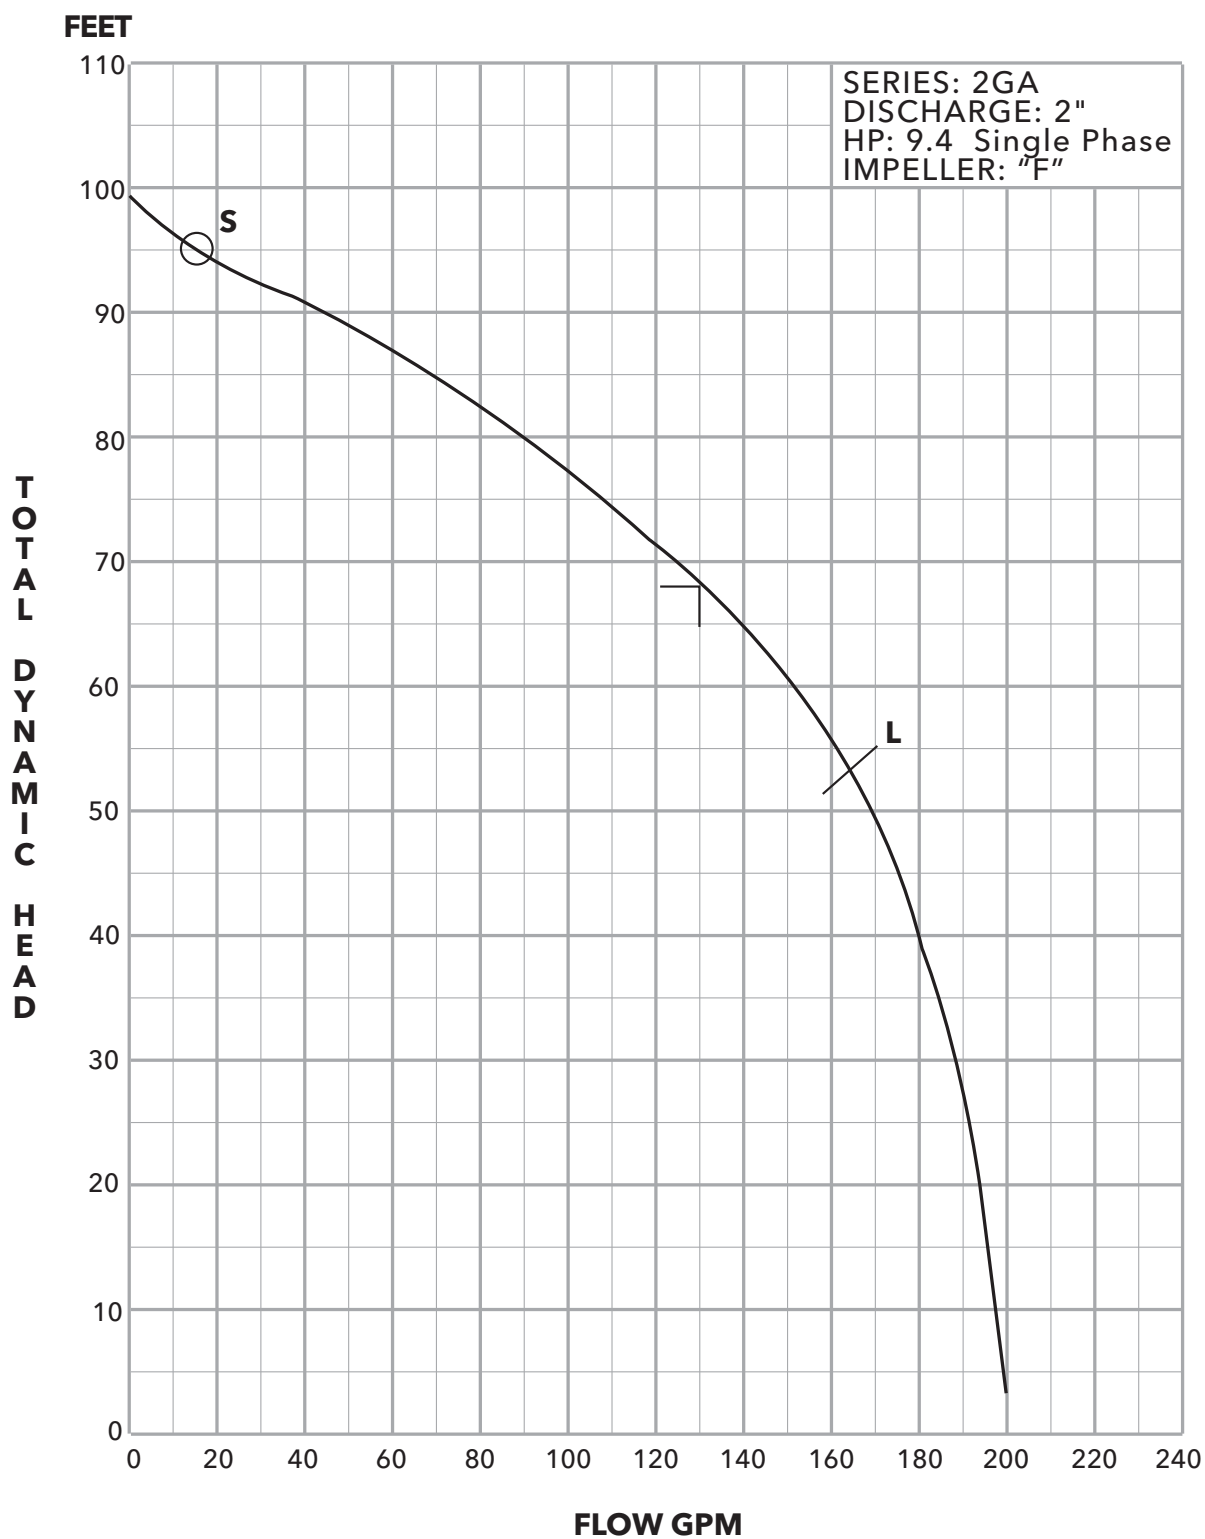


- ┌ = Best Efficiency
- L = Limited to intermittent duty below this point
- S = Risk of sedimentation at velocity below 2 ft./sec.

2GA 9.4 HP Single Phase "J" Curve

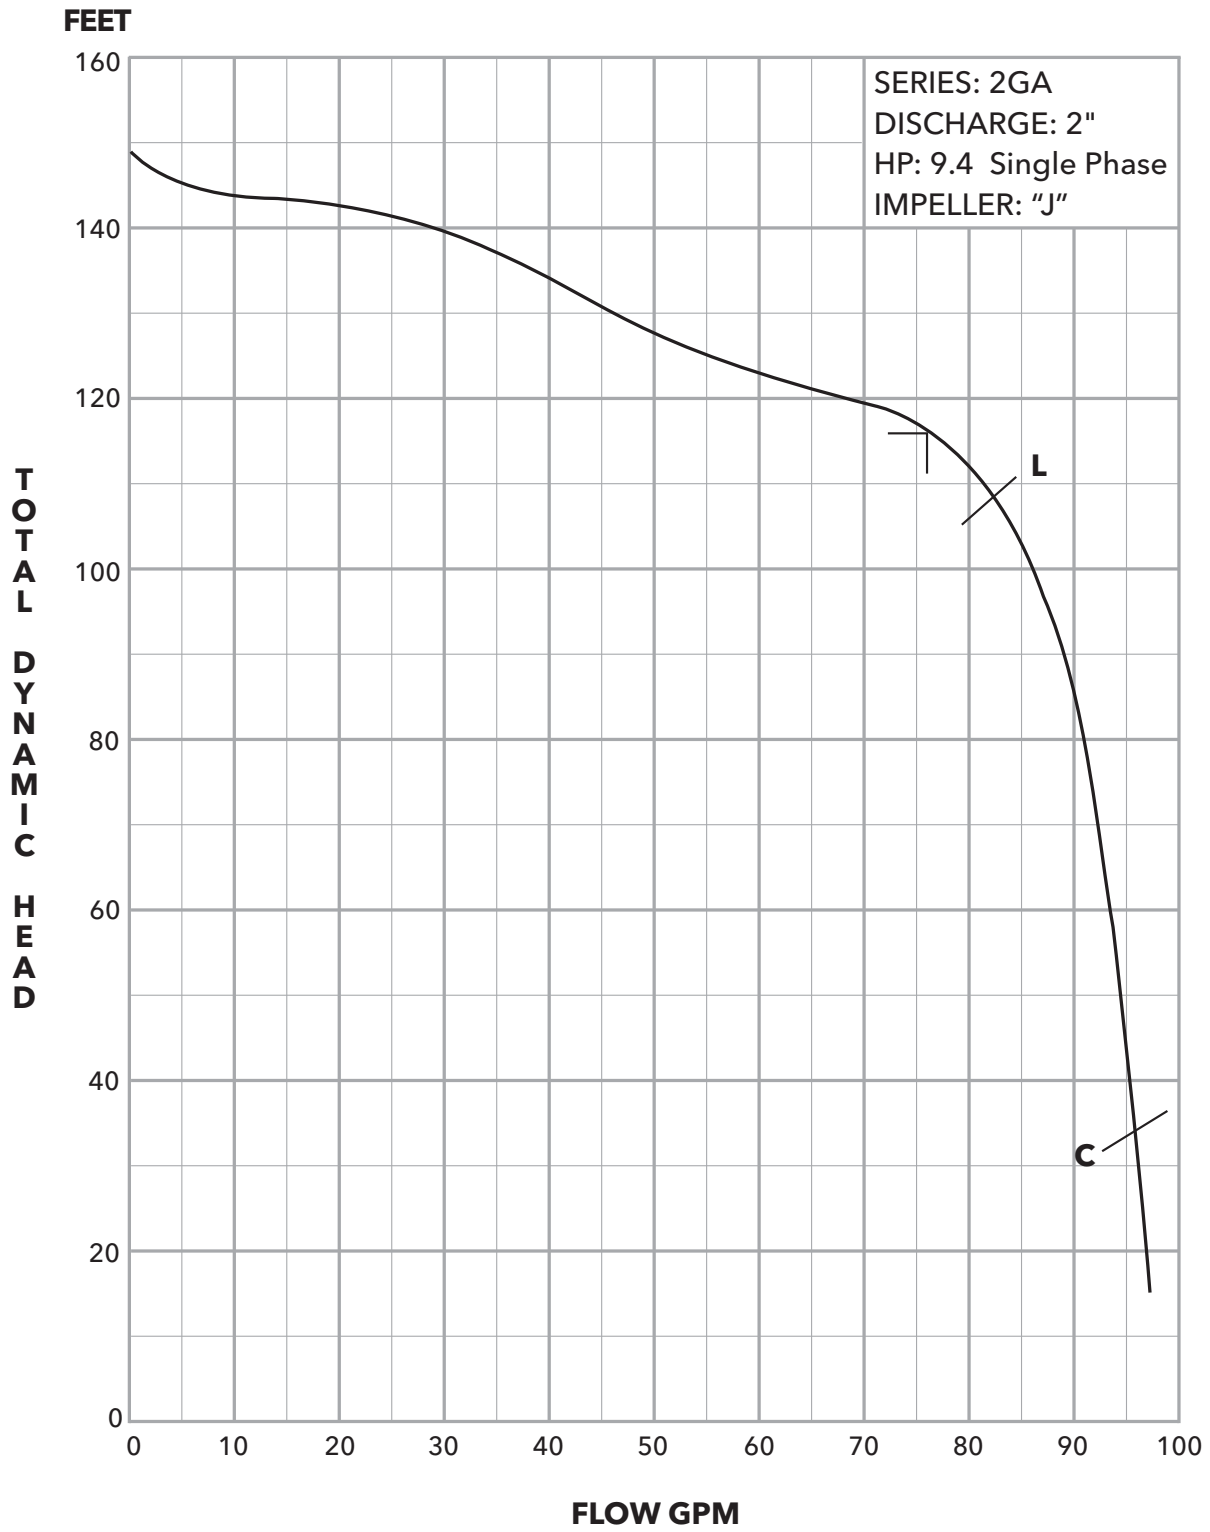


1GA 4 HP Three Phase "C" Curve

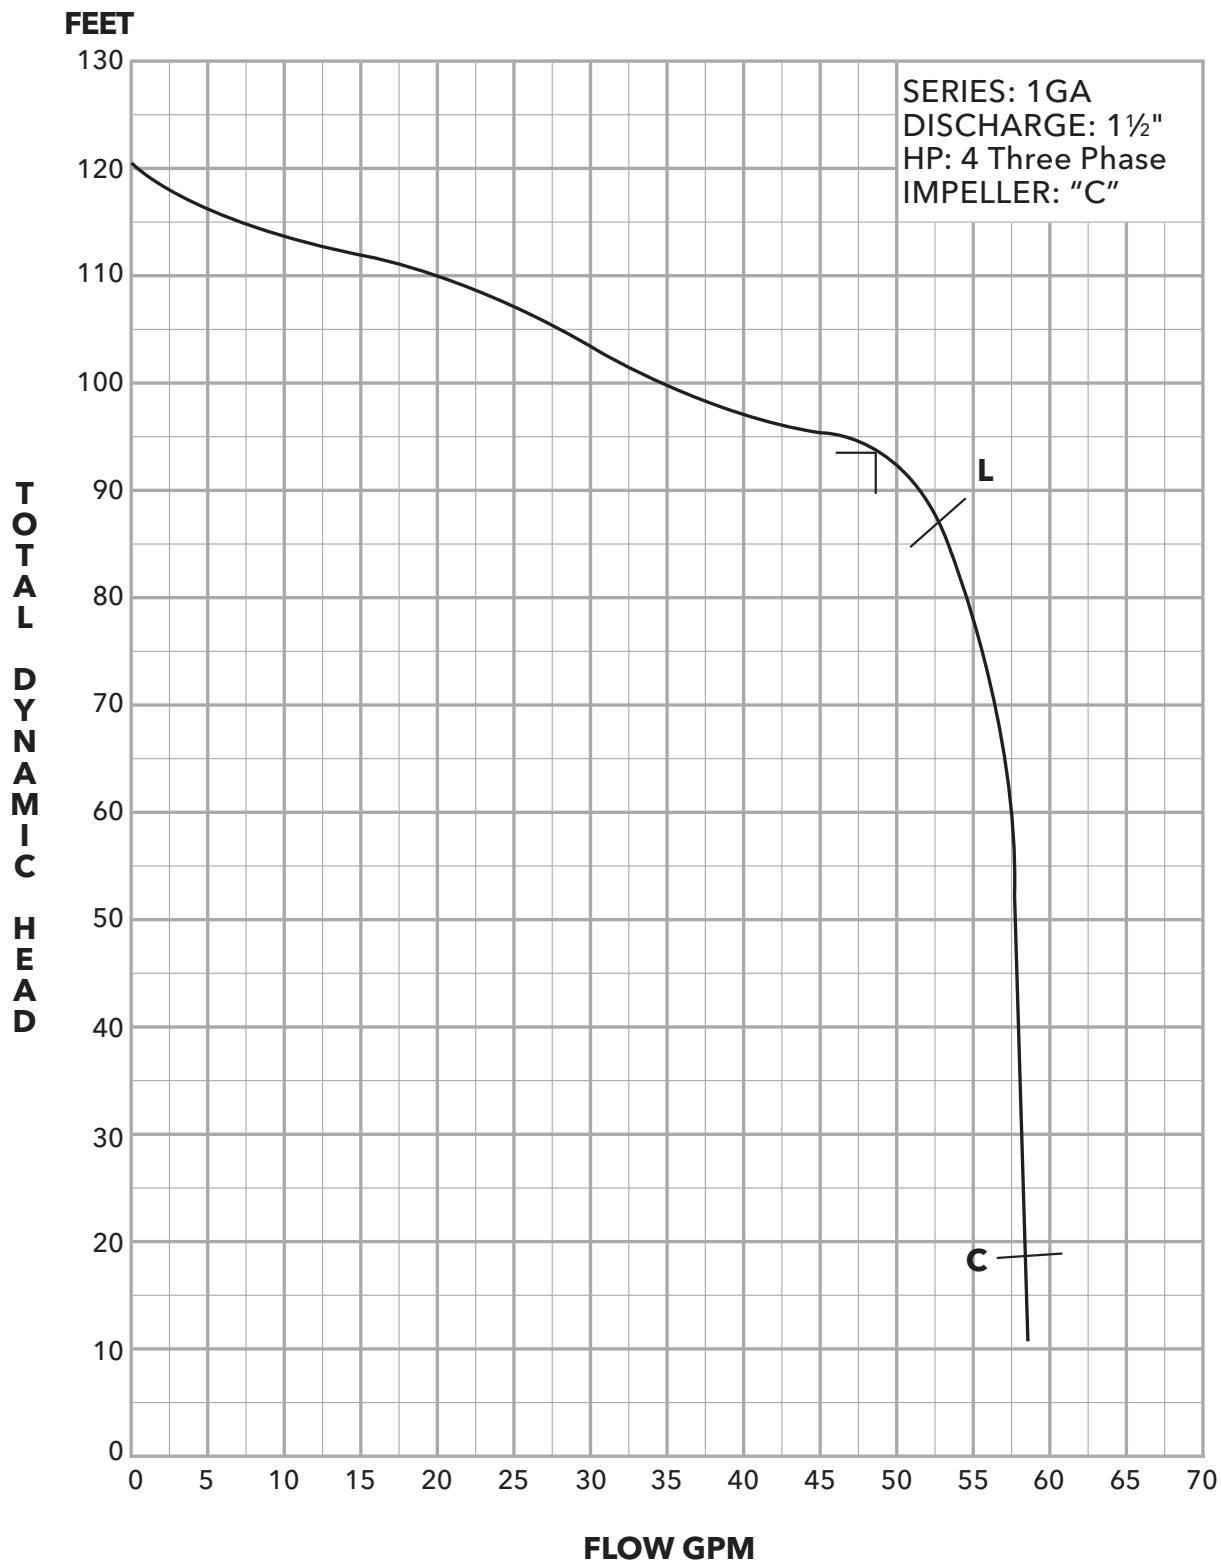

- ┌ = Best Efficiency
- L = Limited to intermittent duty below this point
- C = Cavitation limit


1GA 6 HP Three Phase "B" Curve

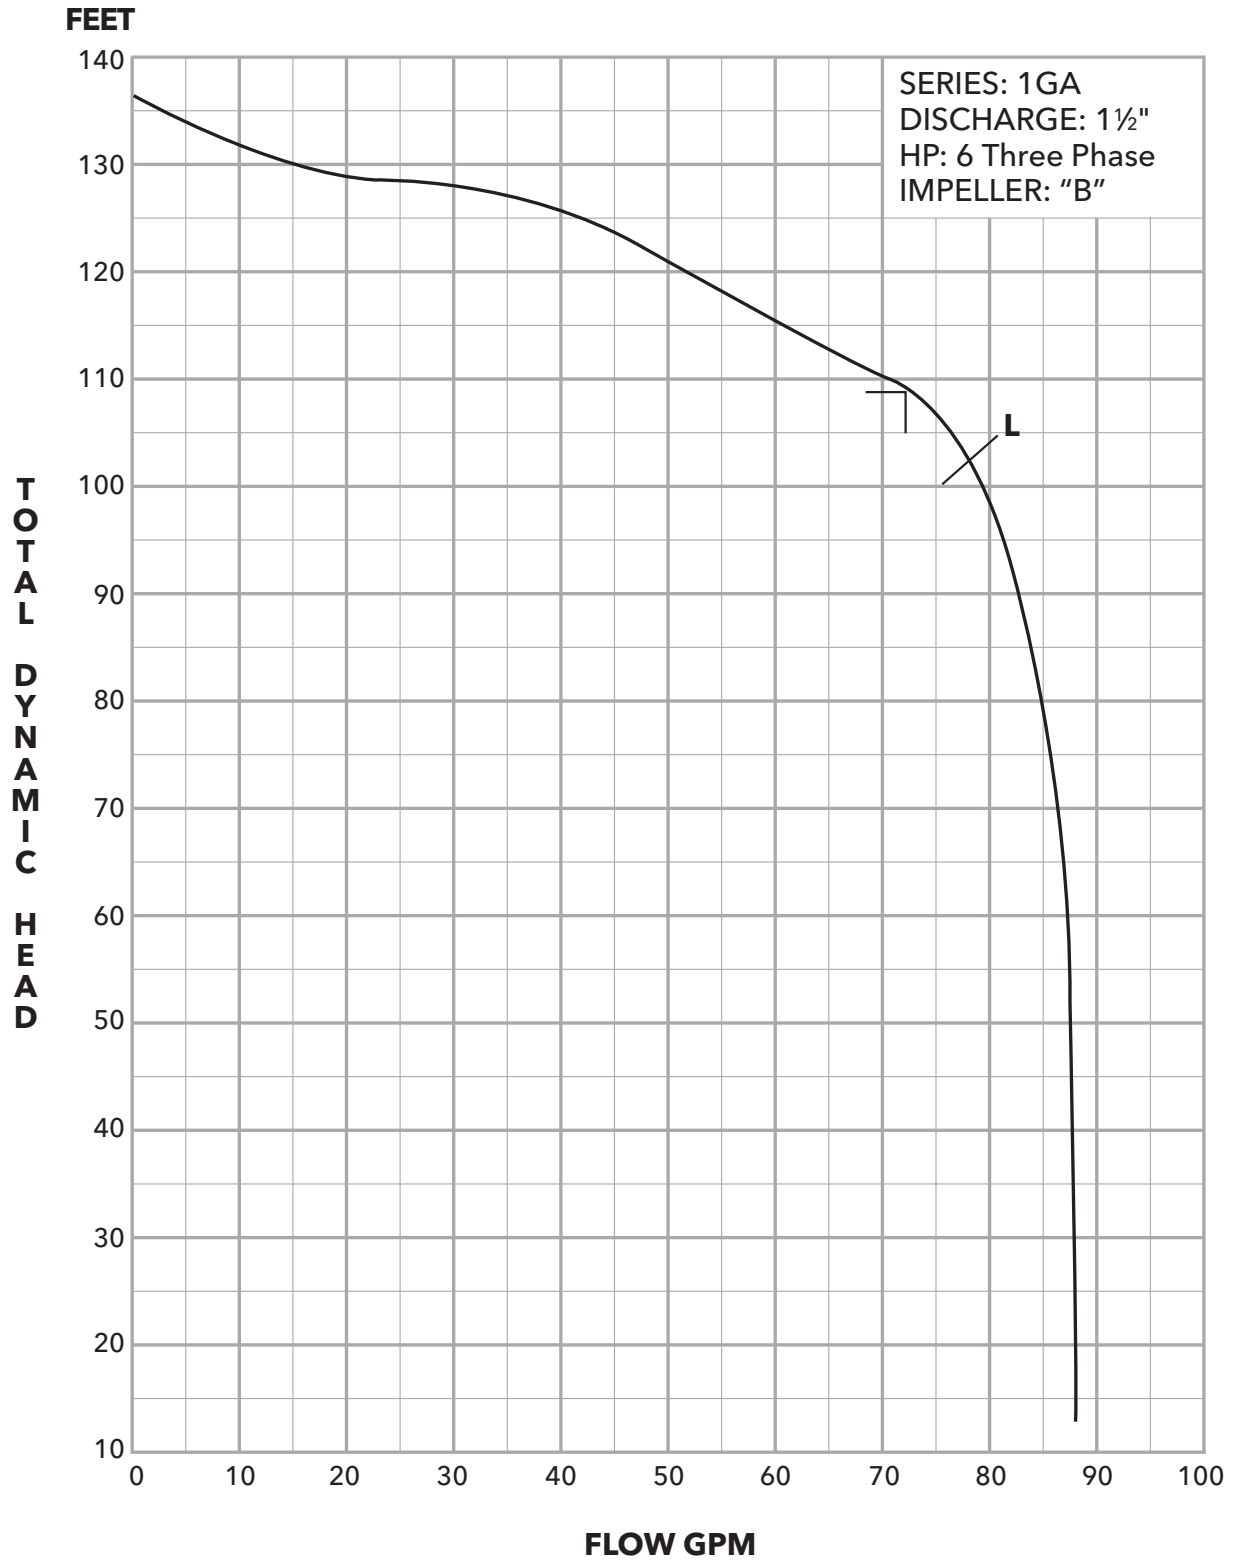

┌ = Best Efficiency


L = Limited to intermittent duty below this point

2GA 6 HP Three Phase "E" Curve

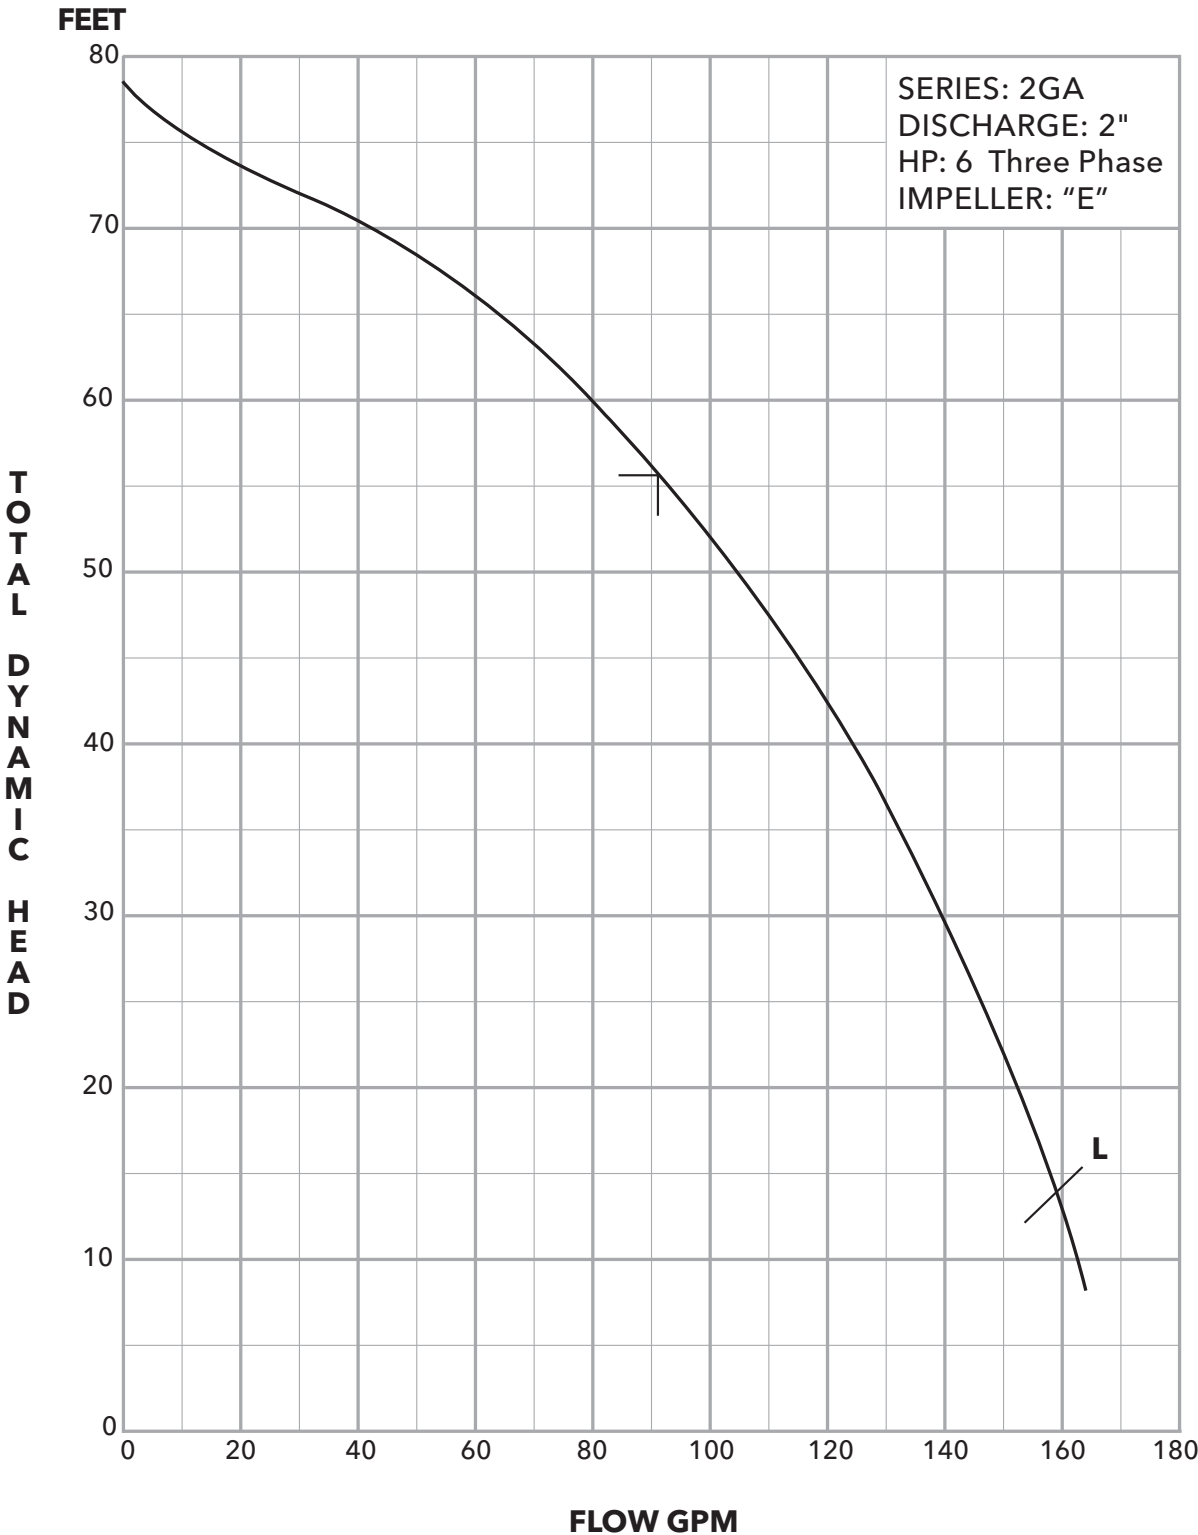


┌ = Best Efficiency
L = Limited to intermittent duty below this point

2GA 11 HP Three Phase "A" Curve

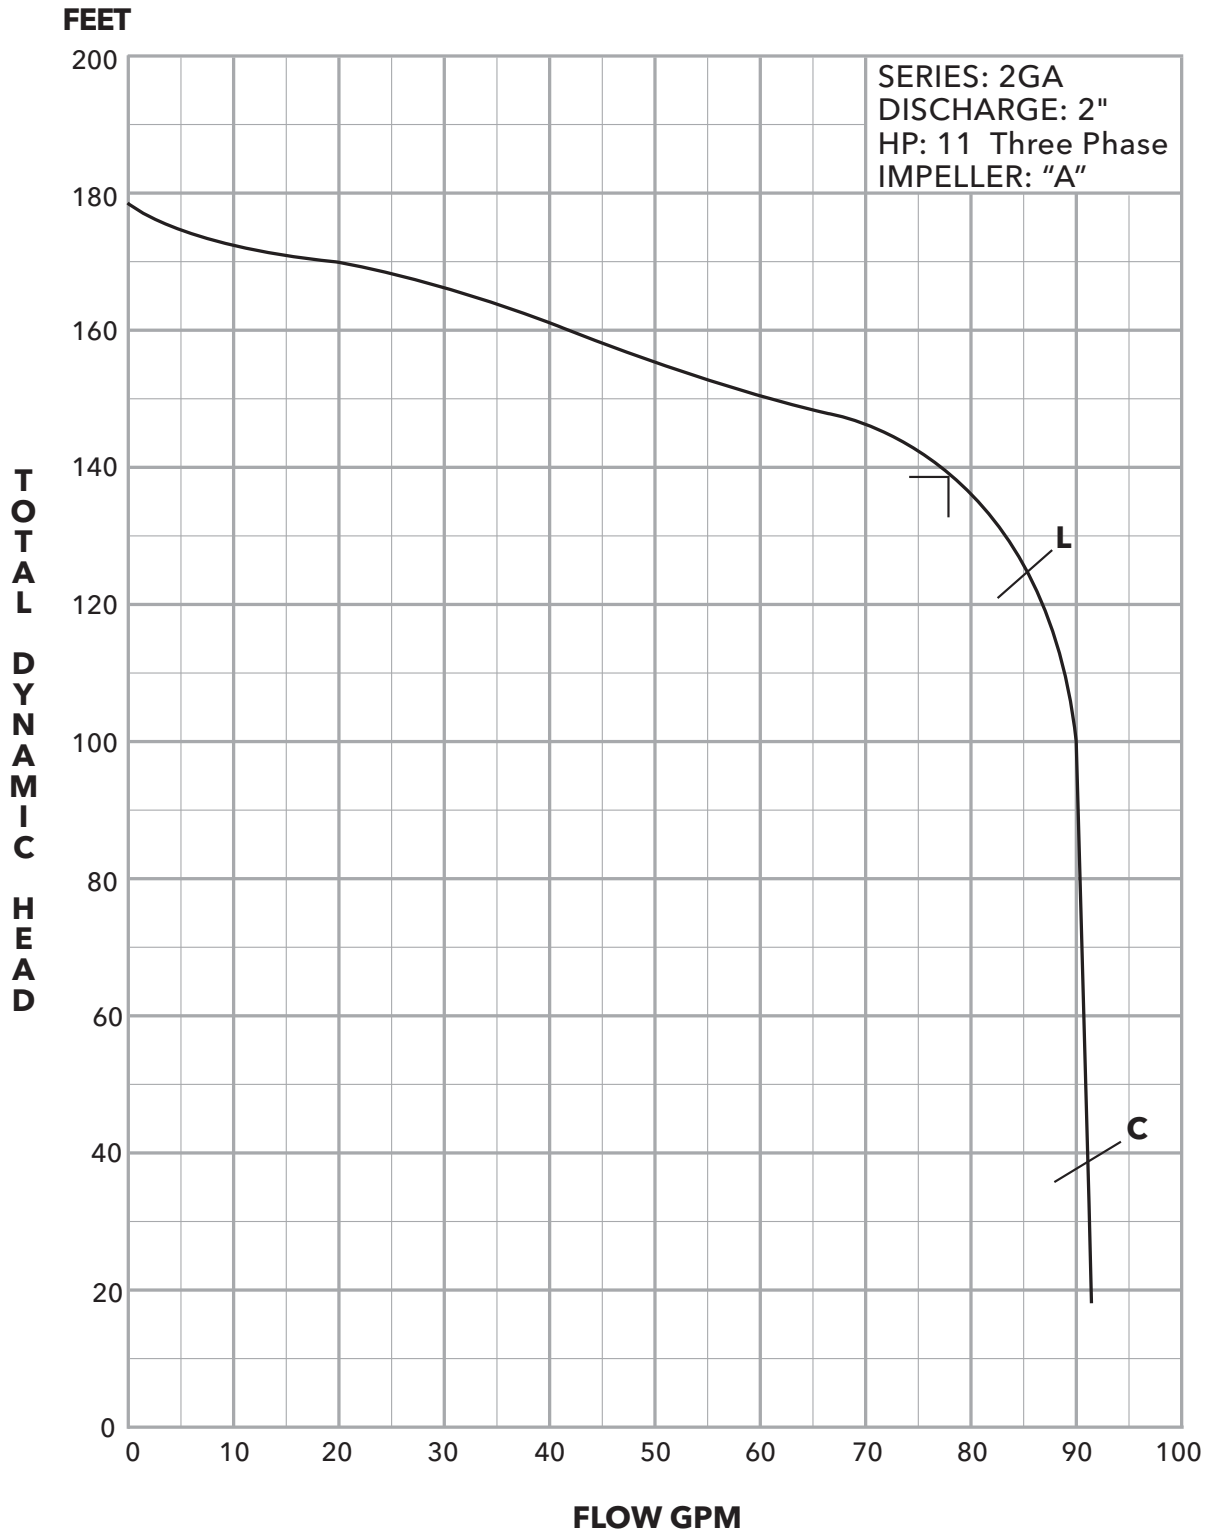

- ┌ = Best Efficiency
- L = Limited to intermittent duty below this point
- C = Cavitation limit

2GA 11 HP Three Phase "D" Curve

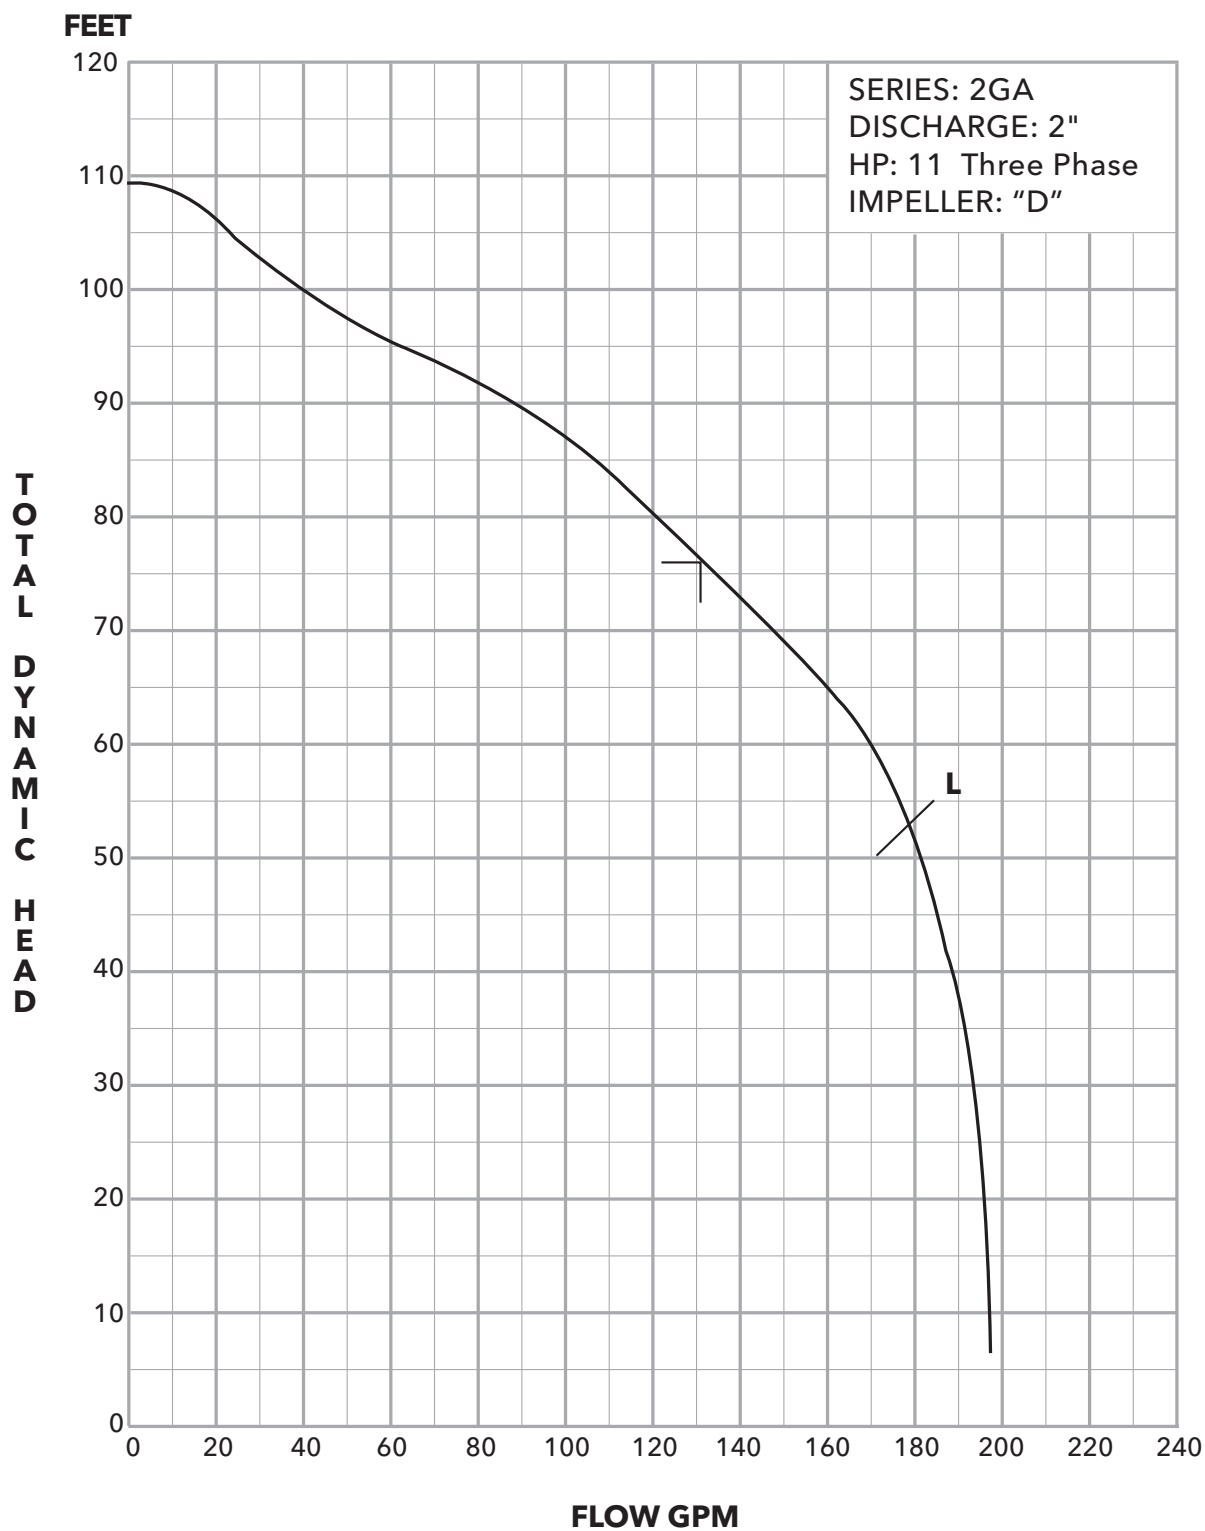

┌ = Best Efficiency
L = Limited to intermittent duty below this point

Notes

Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're 12,500 people unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

For more information on how Xylem can help you, go to www.xylem.com



Xylem Inc.
2881 East Bayard Street Ext., Suite A
Seneca Falls, NY 13148
Phone: (866) 325-4210
Fax: (888) 322-5877
www.gouldswatertechnology.com

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.
© 2015 Xylem Inc. C1GA2GA R3 March 2015