

# Redi-Lock® 250

## 250 PSI Push-On Hose

- **EASY TO COUPLE**
- **LONG LENGTHS ON REELS**

### APPLICATIONS:

- Low Pressure Pneumatic Systems
- Air Tools
- Water, Oil and Mild Chemical Solutions
- Hot and Cold Water

★Not recommended for unleaded gasoline

**Cover:** Nitrile/PVC


**Reinforcement:** Aramid Spiral Yarn

**Tube:** Nitrile

**Oil Resistance:** RMA - Class A

**Branding:** REDI-LOCK 250 PSI <size> MADE IN USA

**Packaging:** Hoses supplied on plastic reels; maximum 2 pcs. on reel

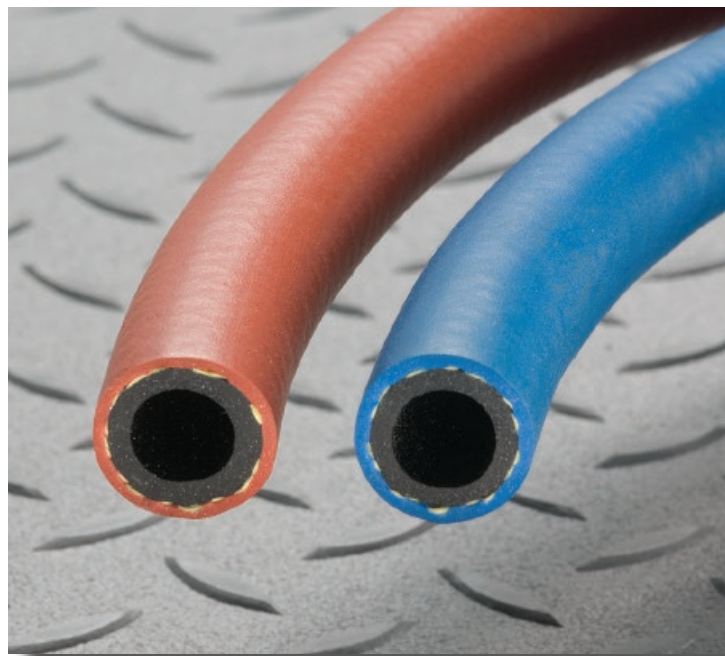

**Note:** For Push-On Fittings and Quick Disconnect Couplings refer to pages 13-15 of this catalog.



**Service Temperature Range:** -20°F (-29°C) to 180°F (+82°C)

### Nominal Specifications

Part Number	Color	ID (in.)	OD (in.)	Working Pressure (PSI)	Reel Length (ft.)	Approx. Weight (lbs/pc)
REDI-RED-04X700	Red	1/4	1/2	250	700	63
REDI-RED-06X700	Red	3/8	5/8	250	700	84
REDI-RED-08X700	Red	1/2	3/4	250	700	112
REDI-BLU-04X700	Blue	1/4	1/2	250	700	63
REDI-BLU-06X700	Blue	3/8	5/8	250	700	84
REDI-BLU-08X700	Blue	1/2	3/4	250	700	112

Note: Cut lengths for this product are available from our Kuriyama Schaumburg, IL Warehouse location. Please call (847) 755-0360 or e-mail: sales@kuriyama.com for more information.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.