


General Purpose PVC Water Discharge Hose

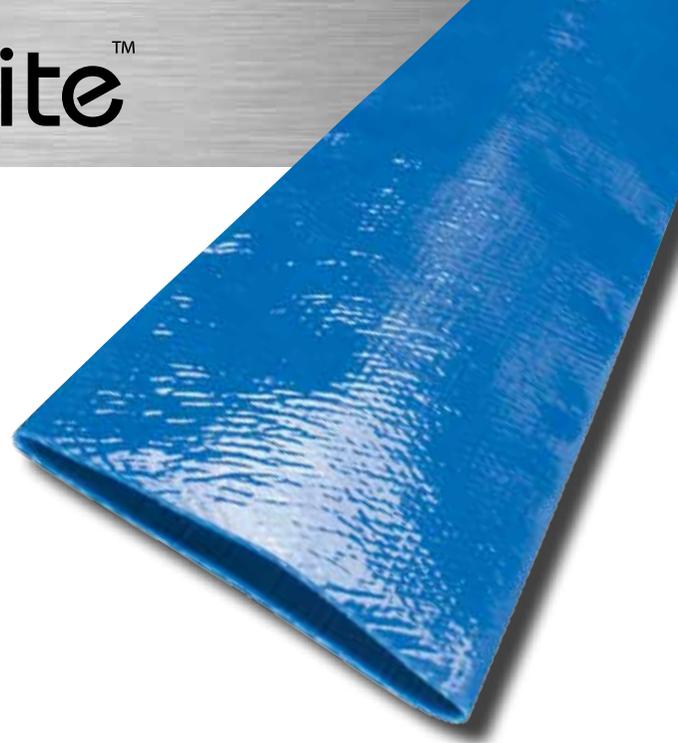

APPLICATIONS:

- Equipment rental • Construction • Agricultural
- General open end water discharge

CONSTRUCTION:

- Features a balanced polyester yarn spiral wrap, longitudinal strength member and homogeneous PVC tube and cover to prevent separation.

FEATURES & BENEFITS:

- Smooth tube - Provides low friction loss.
- EZ - An easy to handle lightweight hose for general purpose applications.
- Ultraviolet inhibitors - Reduces aging and weather checking.
- Storage - All coils have PVC cores for easier dispensing. Hoses coil flat for easy storage.

Please see page 15 for friction loss/elongation information.

Service Temperature: -5° F (-20° C) to 170° F (+76° C)

Nominal Specifications							
Series No.	Size (in.) (mm)	Hose ID (in.) (mm)	Approximate Wall Thickness (in.)	Working Pressure (PSI)	Coil Length (ft.)	Approx. Weight (lbs./coil)	
VFL075	3/4 19.1	.760 19.3	.054	100	300	23.0	
VFL100	1 25.4	1.024 26.0	.051	85	300	30.0	
VFL125	1 1/4 31.8	1.299 33.0	.051	85	300	35.0	
VFL150	1 1/2 38.1	1.614 41.0	.045	65	300	42.0	
VFL200	2 50.8	2.087 53.0	.048	65	300/50	49.0/8.0	
VFL300	3 76.2	3.071 78.0	.055	60	300/50	90.0/15.0	
VFL400	4 101.6	4.094 104.0	.056	60	300	131.0	
VFL600	6 152.4	6.102 155.0	.061	40	300	209.0	
VFL800	8 203.2	8.169 208.0	.073	40	300	312.0	

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.