

AUTOLOK® AND KAMLOK®

The World's Most Popular Cam-And-Groove Quick Disconnects

Autolok® and Kamlok®
Quick Disconnect Couplers

Automatic Locking System Prevents Accidental Disconnect

OPW's Kamlok® and Autolok® Quick Disconnects are the industry standard in cam-and-groove couplers for safety and ease of use. All Kamloks and Autoloks feature the exclusive Twin-Kam™ arm design to help prevent accidental release, and Spring-Ring™ to ensure proper position of finger rings.




Features & Benefits:

- **TWIN-KAM™** arms feature a unique detent position that helps prevent accidental release. Even with both arms partially opened, the Twin-Kam detents hold the adaptor more firmly in the coupler. All arms are **Guaranteed For Life (GFL)**.
- **SPRING-RING™** design prevents finger rings from getting trapped under the arms, ensuring proper closure.
- All **AUTOLOKS** feature an integral automatic self-locking feature. Simply snap the locking arms shut with one smooth motion.
- **CONSTRUCTED OF 316 STAINLESS STEEL**
- **¾" TO 4" SIZES**



opw-es.com


ENGINEERING | WHAT'S NEXT

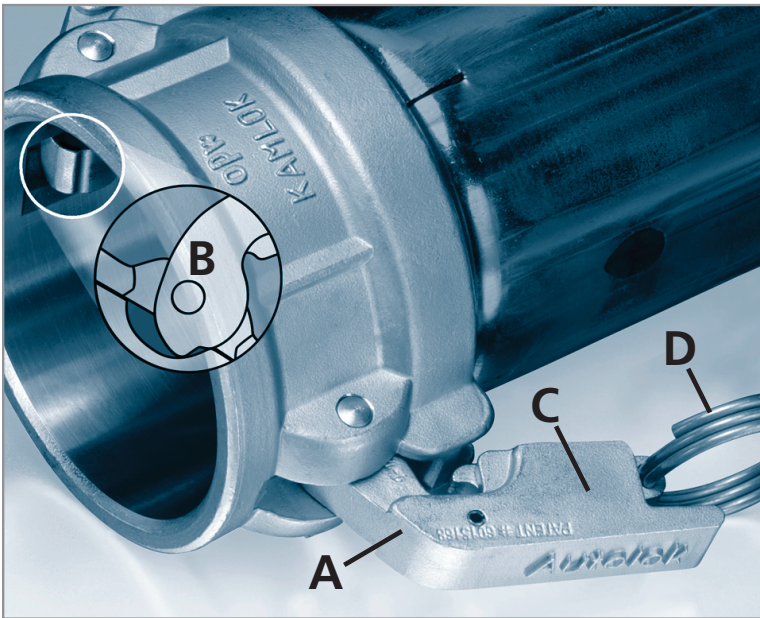

- A** – GFL™ arms guaranteed for life against breakage.
- B** – Twin-Kam™ helps prevent unintentional arm release beyond 45° angle.
- C** – Automatic self-locking arms guard against accidental uncoupling.
- D** – Spring-Ring™ finger ring keeps ring free from arm trapping.



Detent position of Twin-Kam™ arms help prevent unintentional arm release.



Spring-Ring™ Finger Rings prevent rings from getting trapped under arms.

Ordering Specifications

Kamlok® Styles

- A - FNTP Adaptor
- AB - BSPT Adaptor
- AA - Double Adaptor
- B - FNBT Coupler
- D - FNPT Coupler
- E - Hose-Shank Adaptor
- F - MNPT Adaptor
- LAS - 150# FLG Adaptor
- 634A - Dust Plug
- 634B - Dust Cap

633D - SS10

KAMLOK®

MATERIALS

316 SST

SIZES

- 05 - 1/2" 20 - 2"
- 07 - 3/4" 25 - 2-1/2"
- 10 - 1" 30 - 3"
- 12 - 1-1/4" 40 - 4"
- 15 - 1-1/2"

Autolok® Styles

- BL - MNPT
- CL - Hose Shank
- DL - FNPT
- DCL - Dust Cap
- DLB - FBSPT
- LDS - 150# FLG

733CL - 20SB

AUTOLOK®

SIZES

- 05 - 1/2" 20 - 2"
- 07 - 3/4" 25 - 2-1/2"
- 10 - 1" 30 - 3"
- 12 - 1-1/4" 40 - 4"
- 15 - 1-1/2"

MATERIALS

316 SST

GASKETS

- B - Buna-N (Standard)
- E - EPDM
- N - Neoprene
- W - White Neoprene
- T - PTFE
- V - Fluorocarbon
- X - PTFE Envelope-Buna-N
- F - PTFE Envelope-Fluorocarbon
- U - PTFE Encap-Fluorocarbon
- S - PTFE Encap-Silicone

* Call for other available gasket compounds