

FRESHPOINT[®] F1000

SINGLE STAGE FILTRATION SYSTEMS



APPLICATIONS

- ◆ Drinking water

FEATURES • BENEFITS

- ◆ Effortless click-in cartridge change-outs
- ◆ Built-In check valve system means no need to turn off water for cartridge change-outs
- ◆ 3/8" push fittings for easy installation

MODELS

- ◆ F1000-DFB, Chlorine taste and odor reduction
- ◆ F1000-B1B, Advanced chemical reduction

INSTALLATION TIPS

- ◆ Choose a mounting location suitable to support the full weight of the system when operating.
- ◆ Install vertically with the cartridge hanging down.
- ◆ System may be installed with cartridge flush to the baseboard if desired as the mechanical assist lever pushes cartridges straight out.


OPERATION TIPS

- ◆ Replace cartridge every 750 gallons or 1 year (or if flow has diminished).
- ◆ System designed with integrated check valves so cold water line does not need to be shut-off to perform cartridge change-outs.

INCLUDES

- ◆ Side faucet
- ◆ Installation kit
- ◆ Installation and operation manual

FRESHPOINT F1000 SINGLE STAGE FILTRATION SYSTEMS

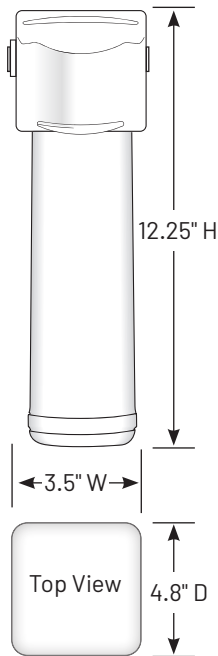

SPECIFICATIONS

- ◆ **Systems** (Model/Part No.)
F1000-DFB/158837
F1000-B1B/158838
- ◆ **Inlet Size**
3/8" QC
- ◆ **Dimensions**
12.25" H X 3.5" W X 4.8" D
(311 mm X 90 mm X 122 mm)
- ◆ **System Weight**
1.80 lbs
- ◆ **Contaminant Reduction**
(See chart below)
- ◆ **Micron Rating**
0.50 (F1000-B1B only)
- ◆ **Approximate Filter Life***
Up to 1 year
- ◆ **Capacity**
750 Gallons (2839.06 Liters)
- ◆ **System Production Rate**
(See chart below)
- ◆ **Certifications**
F1000-DFB: NSF/ANSI Standards 42,
CSA Standard B483.1
F1000-B1B: NSF/ANSI Standards 42, 53
CSA Standard B483.1
- ◆ **Feed Pressure Range**
40 - 100 psi (2.75 - 6.89 bar)
- ◆ **Temperature Range**
40 - 100°F (4.4 - 37.8°C)
- ◆ **Replacement Cartridge** (Model/Part No.)
For F1000-DFB: FDF1-RC/55123-96
For F1000-B1B: F1B1-RC/55120-96

* Filter life dependent on gallon usage and overall incoming water quality.

PART NO.	MODEL NO.	SYSTEM PRODUCTION RATE	SUBSTANCE REDUCTIONS CLAIMS
158837	F1000-DFB	0.75 gpm	Chlorine Taste & Odor
158838	F1000-B1B	0.60 gpm	Chlorine Taste & Odor, Lead, Atrazine, Lindane, Nominal Particulate, Class I, Cyst: NSF/ANSI Standard 53 certified to reduce cysts such as <i>Cryptosporidium</i> and <i>Giardia</i> by mechanical means.

EPA EST. NO. 082989-CHN-001



The Model F1000-DFB is Tested and Certified by NSF International against NSF/ANSI Standards 42, 53 and CSA B483.1 for the reduction of substances specified on the service manual or at www.nsf.org.



The Model F1000-B1B is Tested and Certified by NSF International against NSF/ANSI Standards 42 and CSA B483.1 for the reduction of substances specified on the service manual or at www.nsf.org.



13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States
P: 262.238.4400 | Customer Service: 800.279.9404 | tech-support@pentair.com | pentair.com

§For a detailed list of where Pentair trademarks are registered, please visit www.pentair.com/registrations. Pentair trademarks and logos are owned by Pentair plc or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners.

© 2020 Pentair Residential Filtration, LLC. All rights reserved.

4004684 Rev C FE20