

# **INDUSTRIAL PBH SERIES**

**BAG HOUSINGS** 



The Industrial\* PBH Series Bag Housings keep systems on stream longer by reducing bag filter change time. These assemblies offer all the necessary strength without the weight.

## **FEATURES/BENEFITS**

Lightweight corrosion-resistant polypropylene construction

Single large ACME thread closure ensures quick opening and positive sealing

Outstanding chemical compatibility makes housings ideal for use in a variety of lowflow applications

Equipped with a black, reinforced polypropylene cap

Includes gauge, wrench and .375" drain valve

Portable

Economically priced

Provides uninterrupted flow rates installed as a duplex system

Outstanding chemical compatibility

Filter bags are available in polypropylene felt, absolute-rated high-efficiency polypropylene and nylon monofilament mesh—ideal for filtering and straining applications from 1-800 microns

## **APPLICATIONS**

Commercial Water Food Service Industrial Chemical Industrial Water Residential Pre-filtration

### **OPTIONS**

Choice of 10" or 20" housings Available in 1" and 1.5" NPT sizes

#### **SPECIFICATIONS**

Housing Polypropylene Cap Polypropylene

Gauge Bismuth Brass (lead-free)

Vent Plug Polypropylene

Drain Plug High Density Polypropylene

Ball Valve PVC/Buna-N Seals
Basket Polypropylene


O-ring & Gaskets Buna-N
Max. Temperature 100°F
(37.8°C)

Refer to bag filter specifications sheet for 1-200 micron quick-install bags

MODEL	MAXIMUM	INITIAL ΔP (PSI)	MAXIMUM
	DIMENSIONS	@ FLOW RATE (GPM)	PRESSURE
PBH-410-1	18.38" x 7.45"	1 PSI @ 15 gpm	100 PSI
(1" NPT)	(467 mm x 189 mm)	(0.07 bar @ 57 Lpm)	(6.9 bar)
PBH-410-1.5	18.38" x 7.45"	1 PSI @ 15 gpm	100 PSI
(1.5" NPT)	(467 mm x 189 mm)	(0.07 bar @ 57 Lpm)	(6.9 bar)
PBH-420-1	28.75" x 7.45"	1 PSI @ 15 gpm	90 PSI
(1" NPT)	(730 mm x 189 mm)	(0.07 bar @ 57 Lpm)	(6.2 bar)
PBH-420-1.5	28.75" x 7.45"	1 PSI @ 15 gpm	90 PSI
(1.5" NPT)	(730 mm x 189 mm)	(0.07 bar @ 57 Lpm)	(6.2 bar)

PBH-410 accepts a standard 4"  $\times$  8.25" (102 mm  $\times$  210 mm) bag. Dimensions allow for 1" (25 mm) overlap on basket. PBH-420 accepts a standard 4"  $\times$  18.5" (102 mm  $\times$  470 mm) bag. Dimensions allow for 1" (25 mm) overlap on basket.

# PRESSURE DROP VS FLOW RATE

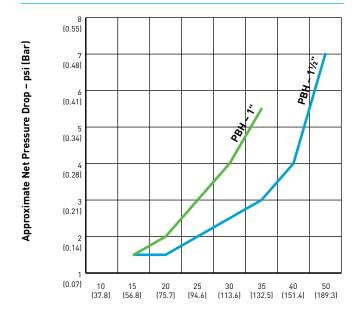

Flow Rate – gpm (Lpm)



#### WATER QUALITY SYSTEMS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209 P: 262.238.4400 | F: 262.238.4404

PENTAIRINDUSTRIAL.COM

CUSTOMER CARE: 800.279.9404 | tech-support@pentair.com

© 2015 Pentair Residential Filtration, LLC. All rights reserved.

\*For a detailed list of where Pentair trademarks are registered, please visit waterpurification.pentair.com. Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners.
4003039 Rev E SE15