

## HD Regulators & Lubricators



R500HD-G



R1250HD-G

- Rugged, heavy duty, high-flow design
- All metal, corrosion-resistant anodized aluminum body
- Tee handle knob, relieving type regulator
- Chemically resistant Buna N diaphragm
- Available with 1/4", 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2" NPT ports
- Gauge included with units

### Regulators

Part #	Flow Capacity (scfm)	Adjusting Range Pressure (psig)	Port Size (NPT)	Maximum Supply Pressure (psig)	Maximum Operating Temp (°F)	Weight (lbs)	Dimensions (inches) Diameter x Height
R250HD-G	86	10-130	1/4"	250	175	1.2	2.25 x 5.12
R380HD-G	100	10-130	3/8"	250	175	1.2	2.25 x 5.12
R500HD-G	108	10-130	1/2"	250	175	1.2	2.25 x 5.12
R750HD-G	175	10-130	3/4"	250	175	3.2	3.75 x 6.75
R1000HD-G	300	10-130	1"	250	175	3.2	3.75 x 6.75
R1250HD-G	450	10-130	1 1/4"	250	175	3.9	4 x 6.75
R1500HD-G	450	10-130	1 1/2"	250	175	3.9	4x 6.75

\*Inlet pressure 100 PSIG (6.9 bar). Secondary pressure 80 PSIG (5.5 bar).

To order without gauge, omit '-G' from the part number



L750HDM



L1000HDM

- Rugged, heavy duty high-flow design
- All metal, corrosion-resistant anodized aluminum body
- Siphon tube filter provides clean lubricant downstream
- Quick-disconnect clamp ring for easy bowl removal
- Adjustable oil feed with tamper-proofing capability
- Can be filled while under pressure
- Available with 1/4", 3/8", 1/2", 3/4", 1" NPT ports

### Lubricators

Part #	Flow	Maximum Supply Pressure (psig)	Port Size (NPT)	Maximum Operating Temp (°F)	Weight (lbs)	Dimensions (inches) Diameter x Height
L250HDM	40	0-250	1/4"	200	3.0	2.5 x 6.88
L380HDM	100	0-250	3/8"	200	3.0	2.5 x 6.88
L500HDM	120	0-250	1/2"	200	3.0	2.5 x 6.88
L750HDM	190	0-250	3/4"	200	3.0	3.75 x 11.25
L1000HDM	270	0-250	1"	200	3.0	3.75 x 11.25

\*Inlet pressure 100 PSIG (6.9 bar). Secondary pressure 80 PSIG (5.5 bar).



(800) 521-9200



www.driair.com | www.rti-pbe.com



@RTIPBE




@rti\_pbe



# HD Regulators & Lubricators

i056\_0217

## HD Regulators & Lubricators



	Replacement Gauge	Repair Kit	Tamper-proof Lock Out Valve	Tamper-proof Lock Assy
R250HD-G	KSG-008	R250HD-RK	R250HD-LO	R250HD-TLK
R380HD-G	KSG-008	R380HD-RK	R380HD-LO	R380HD-TLK
R500HD-G	KSG-008	R500HD-RK	R500HD-LO	R500HD-TLK
R750HD-G	KSG-008	R750HD-RK	R750HD-LO	R750HD-TLK
R1000HD-G	KSG-008	R1000HD-RK	R1000HD-LO	R1000HD-TLK
R1250HD-G	KSG-008	R1250HD-RK	R1250HD-LO	R1250HD-TLK
R1500HD-G	KSG-008	R1500HD-RK	R1500HD-LO	R1500HD-TLK


**Replacement Gauge:** Chrome with glass lens, 0-160 PSI

**Regulator Repair Kit:** Diaphragm assembly, spring, o-rings


**Tamper-proof Lock out Valve:** Tag-out, lock-out valve for safety

**Tamper-proof Lock Assembly:** Keyed lock assembly for regulators


R250HD & R500HD

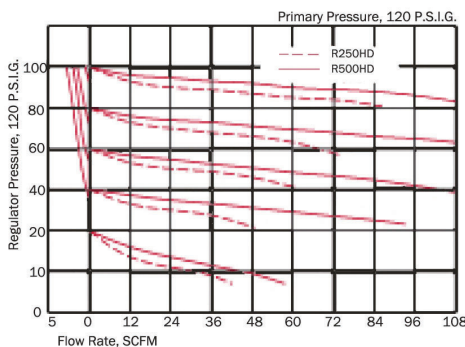

R750HD & R1000HD

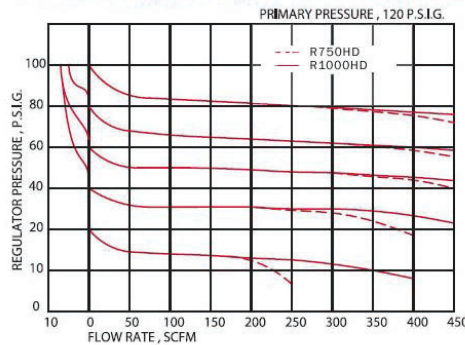

R1250HD & R1500HD

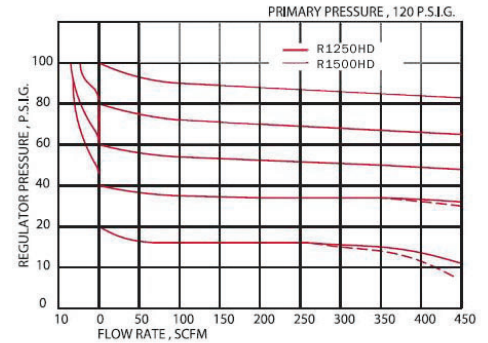

(800) 521-9200



[www.driair.com](http://www.driair.com) | [www.rti-pbe.com](http://www.rti-pbe.com)



@RTiPBE



@rti\_pbe

